



Cardinal Scale  
model HSDC-500  
digital hanging scale  
with pushbutton tare

## HSDC Series

### USA-Made Digital Hanging Scales



LEGAL FOR TRADE

Class III certificate  
All HSDC models are NTEP  
except model HSDC-500



**Stainless Steel Eyehook  
and Hook Included for  
Versatile Weighing Use**


- 1-inch-High Bold LCD Readouts for Easy Visibility
- Aluminum Alloy Enclosure for Lightweight Strength
- Up to 500-lb and 100-kg Capacities Available
- 9 Different Models to Select From
- Battery Powered for Convenient Portable Weighing

# Cardinal Scale's HSDC Series Digital Hanging Scales

Fishing • Curbside Recycling Collection • Butchery/Meat Processing • Industrial Applications • Supermarkets



Powered by 6 C batteries for completely portable weighing (not included)  
Auto Shutoff and Sleep Mode extend battery life

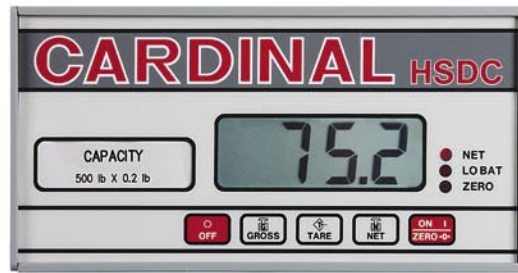

1-inch/25-mm-high bold LCD display  
Lightning-fast and accurate digital readouts

Model HSDC-20KGP includes galvanized scoop and chains

Galvanized scoop measures 13.5 in/34 cm W x 15 in/38 cm D x 6.125 in/15.5 cm H



HSDC-20	HSDC-40	HSDC-100	HSDC-200	HSDC-500	HSDC-20KG/ HSDC-20KGP	HSDC-40KG	HSDC-100KG
20 lb x .01 lb	40 lb x .02 lb	99.95 lb x .05 lb	200 lb x .1 lb	500 lb x .2 lb	20 kg x .01 kg HSDC-20KGP features galvanized scoop	40 kg x .02 kg	99.95 kg x .05 kg
<b>Scale Dimensions</b>		Width: 8.5 in / 21.6 cm Depth: 5.1 in / 13.0 cm Height: 4.3 in / 10.9 cm					
<b>Overall Dimensions</b> (with hooks)		Width: 8.5 in / 21.6 cm Depth: 5.1 in / 13.0 cm Height: 14.0 in / 35.6 cm (including eyehook and hook)					
<b>LCD Display Dimensions</b>		Width: 3.3 in / 8.4 cm Height: 1.1 in / 2.8 cm					
<b>LCD Digit Size</b>		Width: 0.5 in / 1.3 cm Height: 1.0 in / 2.5 cm					
<b>Product Weight</b>		5.8 lb / 2.6 kg (10 lb / 4.5 kg with model HSDC-20KGP's galvanized scoop)					
<b>Shipping Weight</b>		7.2 lb / 3.3 kg (including packaging)					
<b>Power</b>		6 C size alkaline batteries (not included)					
<b>Operating Temperature</b>		+14° to 104°F (-10° to +40°C)					
<b>Zero</b>		Established during setup and maintained automatically to ± 1/4 graduation					
<b>Auto Zero Range</b>		5 and 0 through 9 graduations					
<b>Calibration Method</b>		Digital, keypad entered; calibration stored in nonvolatile memory					
<b>Tare</b>		Push button, 100% of full scale capacity					
<b>Annunciators</b>		Center of zero, motion, net, low battery, over capacity					
<b>Buttons</b>		ON/ZERO, NET, TARE, GROSS, OFF					
<b>Load Cell</b>		USA-made Cardinal Scale model CMBC constant moment beam cell					
<b>Sample Rate</b>		1 - 12 samples per second, selectable					
<b>Auto Shut-off</b>		Power saving mode selectable from 1 to 9 minutes					
<b>NTEP Approval</b>		03-030 Accuracy Class III (applies to all HSDC models except HSDC-500)					

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.

 **Cardinal**  
Cardinal Scale Manufacturing Co.  
203 E. Daugberty, Webb City, MO 64870 USA  
Ph: 417-673-4631 or 800-441-4237 • Fax: 417-673-5001  
[www.CardinalScale.com](http://www.CardinalScale.com)

Mobile: [m.cardinalscales.com](http://m.cardinalscales.com)

**SOLD BY:**