




Run-A-Weigh



PORTABLE FLOOR SCALES



**TWO-WAY
EASY-ACCESS
INTEGRAL RAMPS**

*Features Built-in
Handles, Wheels, and a
Lightweight Frame for
Easy Mobility and Use
in Multiple Locations.*



Cardinal Scale
model RW-1000S
stainless steel washdown
Run-a-Weigh portable floor scale



- Weigh Drums, Barrels, Boxes
- Washdown Stainless Steel or Mild Steel Scales
- Up to 1,000-lb Capacity



- Portable for Convenient Use
- Ultra-Low Profile Design
- Easily Accessible for Heavy Loading
- Under 100 lbs for Easy Mobility
- USA-Made Scale, Load Cells, and Weight Indicator

The Run-a-Weigh Allows You to Set a Weighing Platform Where You Need It, When You Need It! Easily Fits Through Standard Doors.

Cardinal Scale
model RW-1000
Run-a-Weigh portable floor scale

Cardinal Scale's USA-Made Run-a-Weigh Portable Floor Scale rolls to any part of a facility and is instantly ready for accurate weighing. The Run-a-Weigh weighs in at less than 100 pounds and features built-in handles and wheels, so it's easy to lift and roll wherever you need it. Whether it's weighing multiple locations at a single facility or the need to take the scale to a special job site, the Run-a-Weigh gives you true portability. The USA-made Cardinal weight indicator can be set on the floor for mobile use or mounted on a wall or desk for convenient viewing.



Integral Wheels allow you to easily lift and roll the scale to your next location.



Carrying Handles help efficiently guide the mobile scale during transport.




RW-1000S shown here

Quick Connect Cable for the RW-1000S allows the indicator to be quickly unplugged.



Stainless Steel Load Cells feature self-aligning swivel feet.

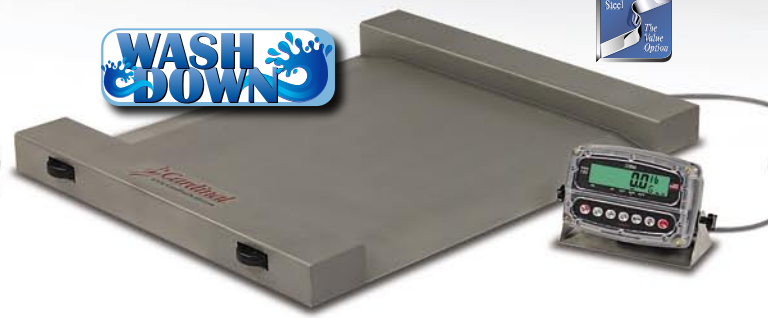

RW-500 / RW-1000

- Heavy-Duty Checkered Mild Steel Deck
- Light Gray Baked-on Powder Paint Finish
- 500 lb x 0.2 lb / 225 kg x 0.1 kg or 1,000 lb x 0.5 lb / 450 kg x 0.2 kg Capacities
- Comes with Cardinal Model 204 Indicator
- (6) Readily-Available C Batteries or Rechargeable Ni-Cad Batteries (not included)
- (1) RS232 Serial Port for Printer Connectivity
- All-Purpose Indicator Mounting Bracket

RW-1000S

- Washdown Stainless Steel Smooth Deck
- 304 Stainless Steel for Harsh Environments
- 1,000 lb x 0.5 lb / 450 kg x 0.2 kg Capacity
- Comes with Cardinal Model 190 Indicator
- IP69K-Rated Polycarbonate Indicator with Capacitive Touch Keys and Backlit LCD
- Optional BP190 Rechargeable Battery Pack
- (1) RS232 Serial Port for Printer Connectivity
- All-Purpose Indicator Mounting Bracket



The Run-a-Weigh's base is engineered to completely protect the stainless steel load cells and internal components from damage with heavy-duty structural steel channel fabrication.

(RW-1000 shown to the left)




SPACIOUS WEIGHING PLATFORM

Cardinal Scale's Run-a-Weigh provides plenty of room for weighing drums, barrels, industrial containers, and small crates. The ultra-low, 2.2-inch-high profile allows easy loading of heavy items.


Cardinal Scale model RW-1000S stainless steel Run-a-Weigh portable floor scale shown here with IP69K-rated 190 indicator.



Choose the Run-a-Weigh Scale Model That Best Fits Your Weighing Requirements

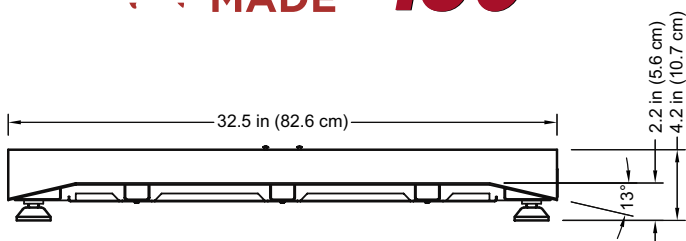

RW-500 / RW-1000 / RW-1000S

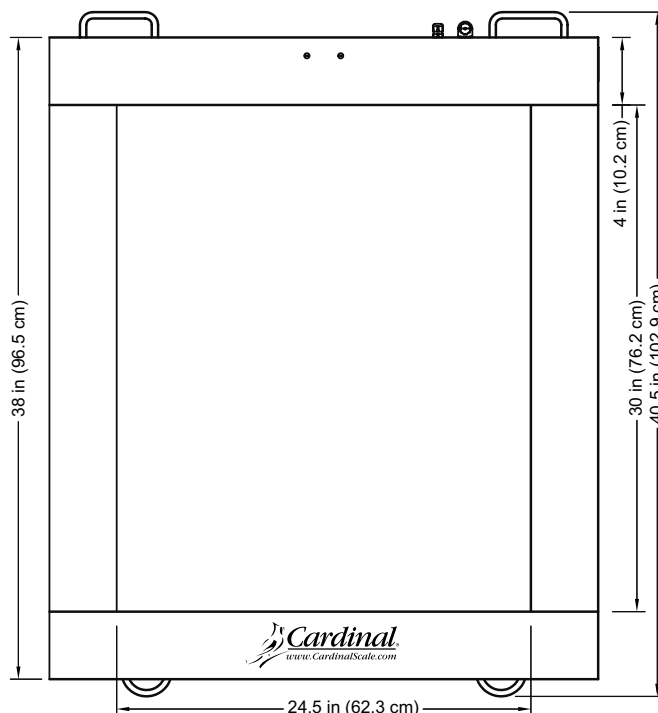

Model:	RW-500	RW-1000	RW-1000S
Capacity:	500 lb x 0.2 lb / 225 kg x 0.1 kg	1,000 lb x 0.5 lb / 450 kg x 0.2 kg	1,000 lb x 0.5 lb / 450 kg x 0.2 kg
Scale Material:	Heavy-duty mild steel with checkered deck and baked-on powder paint	Heavy-duty mild steel with checkered deck and baked-on powder paint	304-grade stainless steel with smooth deck surface
Washdown:	No	No	Yes
Platform Size:	24.5 in x 30 in (62 cm x 76 cm)	24.5 in x 30 in (62 cm x 76 cm)	24.5 in x 30 in (62 cm x 76 cm)
Weight Indicator:	USA-Made Cardinal model 204 general purpose stainless steel with 6 C batteries (not included)	USA-Made Cardinal model 204 general purpose stainless steel with 6 C batteries (not included)	USA-Made Cardinal model 190 IP69K-rated washdown polycarbonate with capacitive touch keys
Display:	Six-digit, seven-segment, 1.0-in (25-mm) high LCD	Six-digit, seven-segment, 1.0-in (25-mm) high LCD	Six-digit, seven-segment, 1.0-in (25-mm) high backlit LCD
Power:	115 VAC 60 Hz adapter, or 230 VAC 50/60 Hz, or 6 C cell alkaline or rechargeable Ni-Cad batteries	115 VAC 60 Hz adapter, or 230 VAC 50/60 Hz, or 6 C cell alkaline or rechargeable Ni-Cad batteries	100 to 240 VAC (50/60 Hz) Optional model BP190 lithium ion rechargeable battery pack available
Load Cell:	(4) USA-Made Cardinal model LFB-250M stainless steel shear beam with self-aligning swivel feet	(4) USA-Made Cardinal model LFB-500HMT stainless steel shear beam with self-aligning feet	(4) USA-Made Cardinal model TB-1KM stainless steel shear beam with self-aligning swivel feet
Cable (Included):	15 ft (4.5 m) coiled load cell connection	15 ft (4.5 m) coiled load cell connection	15 ft (4.5 m) load cell connection
Temperature Range:	14° to 104° F (-10° to +40° C)	14° to 104° F (-10° to +40° C)	14° to 104° F (-10° to +40° C)
Product Weight:	95 lb / 43 kg	95 lb / 43 kg	95 lb / 43 kg
Shipping Weight:	105 lb / 48 kg	105 lb / 48 kg	105 lb / 48 kg

All 3 scales are also available to order LPAN (without an indicator). To order, specify model RW-1000-LPAN, etc.

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.



Mobile: m.cardinalscales.com

SOLD BY: